PREMIUM LINEAR GAS FIREPLACES



A Transitional Interpretation of Fire

Fireplace Xtrordinair® has pushed the limits of fire once again, by creating our most transitional lineup of fireplaces yet. We've taken a traditional fireplace and extended the length to give it a sleek linear profile with tall, dancing flames that emerge from a bed of glowing, under-lit crushed glass. The result is our Premium High Output Linear Deluxe Gas Fireplace Series.

The Perfect Balance of Beauty and Function

The 3615, 4415, 4415 See-Thru, and 6015 models are high output heaters that represent the very best of home heating and style. These fireplaces feature variable heat outputs and can be personalized or finished to complement any home's décor, making them perfect for any living space, from cozy dens to great rooms.

Quality and Craftsmanship

Our fireplaces are proudly manufactured in America at the House of Fire in Mukilteo, Washington. We utilize the finest materials and subject them to vigorous testing standards to make fireplaces that stand up to the rigors of time. These fireplaces are the best money can buy.

Cover: 6015[™] shown with the Black Painted Fireback, Traditional Log Set, and Black Glass Media.

4415™ See-Thru shown with the Ledgestone Fireback, Driftwood Log Set, and Bronze Glass Media.





Features You're Going to Love

- High output home heaters
- Sleek linear burner with tall dancing flames
- Adjustable under-lit accent lighting highlights the beautiful flames and glass media. This feature can also be used as mood lighting in the room when the fireplace is not burning.
- GreenSmart® Deluxe multi-function wireless thermostat remote control
- 180 CFM convection fan circulates heated air throughout the home.
- Transitional Fyre-Art[™] and media options.
- Huge neo-ceramic glass viewing area with nearly invisible ClearFire™ safety screen.
- Bi-metallic damper in the exhaust automatically opens at start-up and closes as the fireplace heats up to ensure the best looking flame and performance at all times.
- Heavy duty, welded 14-gauge steel fireplace body.












INTERIOR FLOOR MEDIA (Required)

Choose between sleek colored crushed glass or rock embers for the floor of your fireplace.

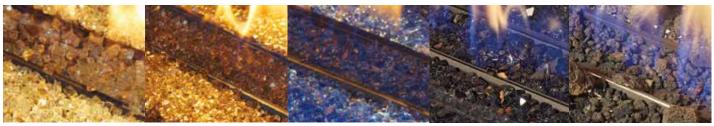

Platinum Glass

Bronze Glass

Cobalt Glass

Reflective Black Glass

Rock Embers

FIREBACKS (Required)

Select one of our decorative firebacks to enhance the interior of your fireplace.

FYRE-ART™ (Optional)

Although not required, these transitional Fyre-Art™ options allow you to personalize your fireplace with a little added style.



Black Painted Fireback Creates the illusion of a large, deep firebox.



Tumbled Stones



Driftwood Twigs and Stones



High Gloss Black Glass Fireback Creates a rich flame reflection.



Traditional Log Set



Ledgestone Fireback A naturally dramatic fireback with threedimensional shadowing from the flames and light.



Birch Log Set



Driftwood Log Set

TRIMS & FACES

Finish your fireplace by selecting the trim or face style that best complements your decor.



A sleek, modern look with beveled edges that beautifully frames the fire.

2" Trim Kit

A simple decorative option that offers a clean, finished look.

IronWorks™ Trim

A hand-hammered charcoal painted option to add style and color.

Bronze Patina

Limited to Stock on Hand

•

Burnished Patina
Limited to Stock on Hand

Gallery Face Option

The Gallery Face is black painted and accommodates tile or stone facing up to 1" deep. It features beveled sides that draw the eye in towards the fire, giving the fireplace a larger presence.

Dimensions by model.

3615: 47" W x 19-5/8" H 4415: 55" W x 19-5/8" H 6015: 71" W x 19-5/8" H




Safely Add A TV Above Your Linear Fireplace With The Optional CoolSmart TV Wall™ Kit



- Cool room air is naturally pulled into the bottom of the convection chamber surrounding the firebox.
- B If the convection fan is turned on, the heated air is returned to the room above the fireviewing glass.
- The CoolSmart TV Wall™ Kit allows a TV to be safely installed above the fireplace, either flush or recessed up to 3-1/8" into the wall.



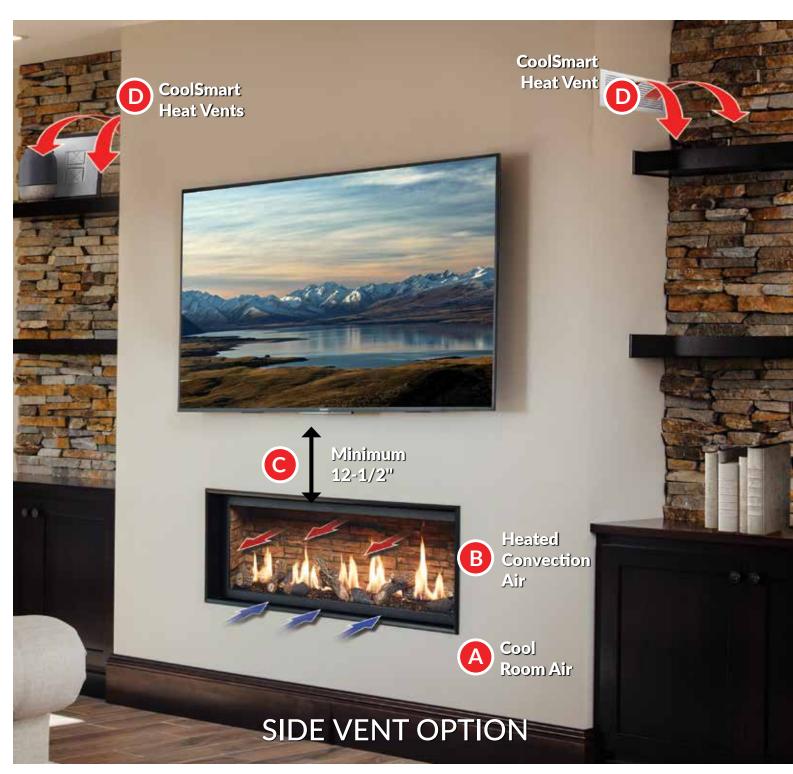

If the fan is turned off, cool room air and the majority of the heated convection air are naturally drawn up through the CoolSmart Heat Vent(s) and returned to the room above the TV. This reduces the height the TV needs to be installed above the fireplace.


Coolsmart TV Wall[™] Kit Is Not Available For The 4415 See-Thru Model



These Deluxe Gas Fireplaces feature the patented GreenSmart® System.

This proprietary system is the most innovative collection of components, controls, and technology that when combined provides an elegant, greener, and smarter way to heat your home.

GreenSmart® Deluxe Multi-Function
Wireless Thermostat Remote Control









Remote Functions:

- Two Thermostat Modes
- Change Between IPI GreenSmart® and CPI Pilot Modes
- Flame Adjustment (6 levels)
- Convection Fan Operation (6 levels)
- Under-lit Accent Lights

SPECIFICATIONS

Model 3615

• Heating Capacity*: Up To 1,700 sq. ft.

• Variable Input: 18,331 to 33,000 BTUs/Hr (NG) / 17,555 to 33,000 BTUs/Hr (LP)

Glass Size: 34" W (864 mm) x 13" H (330 mm)
 Steady State (High):** Up to 75.22% NG / 77.38% LP

• EnerGuide P4 Efficiency:**†: 61.96% NG / 64.08% LP

Model 4415

• Heating Capacity*: Up To 2,100 sq. ft.

• Variable Input: 21,672 to 42,000 BTUs/Hr (NG) / 21,413 to 42,000 BTUs/Hr (LP)

Glass Size: 42" W (1118 mm) x 13" H (330 mm)
 Steady State (High): ** Up to 77.08% NG / Up to 77.39% LP

• EnerGuide P4 Efficiency:**† 63.41% NG / 64.14% LP

Model 4415™ See-Thru NOT APPROVED FOR INDOOR/OUTDOOR INSTALLATION

• Heating Capacity*: Up To 2,100 sq. ft.

• Variable Input: 21,672 to 42,000 BTUs/Hr (NG) / 21,413 to 42,000 BTUs/Hr (LP)

• Glass Size: 2 x 42" W (1118 mm) x 13" H (330 mm)

• Steady State (High): **
Up to 80.67% NG / 82.84% LP

• EnerGuide P4 Efficiency:**† 71.50% NG / 73.54% LP

Model 6015

• Heating Capacity*: Up To 2,800 sq. ft.

• Variable Input: 30,273 to 56,000 BTUs/Hr (NG) / 29,626 to 56,000 BTUs/Hr (LP)

Glass Size: 58" W (1473 mm) x 13" H (330 mm)
 Steady State (High):** Up to 77.34% NG / 78.74% LP
 EnerGuide P4 Efficiency:** † 63.26% NG / 65.27% LP

* Heating Capacity will vary with floor plan and ceiling height, insulation, and outside ambient temperature.

** Your results may vary depending on your vent configuration.

† P4 Efficiency determined using CSA P4.1-09.

Minimum Clearances To Combustibles

For Models 3615, 4415 and 6015

A = Clearance to Side of Fireplace 5/8" (16mm). Do not place insulation in this space.

B = Clearance to Back of Fireplace 1/8" (4mm). Do not place insulation in this space.

C = When installed, walls in front of the fireplace must be a minimum 3" (77mm) to the side of the fireplace.


Minimum Clearances To Combustibles


For 4415 See-Thru

A = Clearance to Side of Fireplace 5/8" (16mm). Do not place insulation in this space.

B = When installed,

walls in front of the fire- place must be a minimum 3" (77mm) to the side of the fireplace.






The 4415 See-Thru fireplace cannot be installed as an Indoor/Outdoor Fireplace as this would allow outside air infiltration into the home. If installed in an Indoor/Outdoor application, the dealer nor Travis is responsible for any issues that will arise.

NOTE: Always refer to the owner's manual for complete installation instructions. Failure to do so can resulting in voiding of the warranty and present a potential safety hazard! Manual can be found at FireplaceX.com

Minimum Framing Requirements

Framing illustrated below cannot be used with the CoolSmart TV Wall™ Kit. See the CoolSmart TV Wall™ Kit Installation Instructions for correct framing dimensions with this option.

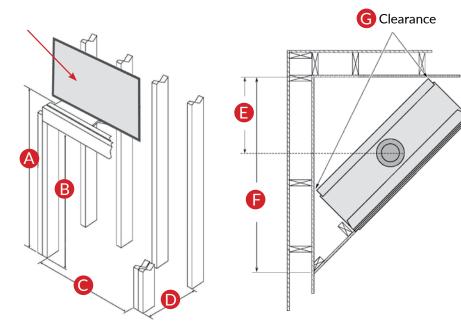

NOTE: ALWAYS REFER TO THE PRODUCT OWNER'S MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS. FAILURE TO DO SO CAN RESULT IN VOIDING OF THE WARRANTY AND PRESENT A POTENTIAL SAFETY HAZARD! MANUAL CAN BE FOUND AT FIREPLACEX.COM

Model 3615

- A 54" (1372mm)
- B 54" (1372mm)
- C 40-3/4" (1036mm)
- D -17" (432mm)
- E 19-1/2" (495mm)
- F 52-1/8" (1324mm)
- G 5/8" (16mm)

Model 4415

- A 60" (1524mm)
- B 60" (1524mm)
- C 48-3/4" (1239mm)
- D -17" (432mm)
- E 22-1/2" (572mm)
- F 58-1/4" (1480mm)
- G 5/8" (16mm)

Model 4415 See-Thru

- A 64" (1626mm)
- B 64" (1626mm)
- C 52-1/4 (1328mm)
- D-16-1/4 (413mm)

Model 6015

- A 66" (1677mm)* / 72" (1829mm LP)**
- B 66" (1677mm)* / (72" 1829 mmLP)**
- C 64-3/4" (1645mm)
- D -17" (432mm)
- E 29" (737mm)
- F 69" (1753mm)
- G 5/8" (16mm)

*NG (all configurations) or LP with 36" Rise (or greater)
**LP with Minimum Vent (24" Rise)

Optional Power Exhaust Vent Kit - Horiz Termination ONLY!

For difficult venting restrictions, we offer a Power Exhaust Vent Kit that allows you to install our gas fireplaces virtually anywhere in your home. This Power Exhaust Vent Kit accommodates vent runs up to 100 feet, or up to 50 feet either horizontal or vertical, with a maximum of 12 elbows! This fan option requires electricity to operate the fireplace.



7-YEAR "REAL WORLD" WARRANTY

Our 7-Year Warranty offers more protection on key components than the so-called "Limited Lifetime" warranties of our competitors. Fireplace Xtrordinair® builds fireplaces to last a lifetime.

We'll stand behind the quality and performance of our products year after year because that's the way we do business - and you don't have to read the fine print for your peace of mind. We even continue to sell service parts that date back 42 years.

YEARS 1-2:

All parts, electronics, and labor (Light bulbs, paint and gaskets are excluded.

YEARS 3-5:

All parts and labor on the firebox and glass frame (not including screen or glass). Electronics, electrical components, burner and accessories are excluded. **YEARS 6-7:**

Parts only on the firebox.



FireplaceX.com Manufactured by Travis Industries, Inc Mukilteo, WA FireplaceX™ Gas Fireplaces are protected by one or more of the following patents; U.S. 8,469,021, 7,066,170, 6,602,068, 6,443,726, 6,953,037; Canada 2755517 as well as other U.S. and Foreign Patents pending. Photos and illustrations are for descriptive purposes only. We reserve the right to improve or change our products without prior notification. GreenSmart® and all other trademarks belong to Travis Industries, Inc. Consult the Installation Manual for complete installation requirements.